

Technical Information ETC-20 Solar Collector

International Version A11-01.2.2.1-PB-V1 - March 2015

Part Codes

ETC-20 Solar Collector Complete is comprised of: 1 x ETC-20-KIT (Manifold and standard frame) 2 x BOX-ET/HP-10/10 (Tubes and heat pipes)

Applications

The Apricus ETC-20 collector is designed to be used in a wide variety of solar thermal (heat) applications in almost any climate. The evacuated tube and heat pipe technology provides very efficient and reliable solar thermal production in a simple to install design.

Features

- Twin glass evacuated tube (passive solar tracking)
- Freeze resistant heat pipes
- Only 4 braze points, extremely reliable header design
- Steam-back and drain-back compatible
- · Potable water certified copper header pipe
- · Flared compressions fittings for reliable, leak free connections
- Cyclone rated, corrosion resistant aluminium mounting frame
- 10 year limited warranty on tubes and heat pipes
- 15 year limited warranty on copper header and AL frame
- · Efficient performance at high differential temperatures

Materials of Construction

Evacuated Tubes:	Borosilicate 3.3 Glass
Absorber:	Cu-AL/N-SS
Heat Pipes:	High purity copper
Heat Transfer Fins:	Aluminium
Rubber Components:	HTV Silicone Rubber
Mounting Frame:	6005-T5 Anodized Aluminium
	316 SS Fasteners
Manifold Casing:	3003 AL, PVDF coating

Performance Data

Recommended Flow Rate:	1.4 L/min
Max Flow Rate:	15 L/min
Peak Power Output:	1342 W
Eta0:	0.714 *
a1 (W/m²K):	1.243 *
a2 (W/m²K²):	0.009 *

* Data from TUV report 154035663 for Solarkeymark certification.

Physical Specifications

Dimensions (WxHxD): Aperture Area: Gross Area: Gross Dry Weight: Fluid Capacity: Max Operating Pressure: Stagnation Temperature:

Certifications

Solarkeymark: AS/NZS 2712-2007: SRCC OG100: USEC: NSF-61 Tested:



100633


17248

10001911 S-5995





Collector Performance (aperture area)

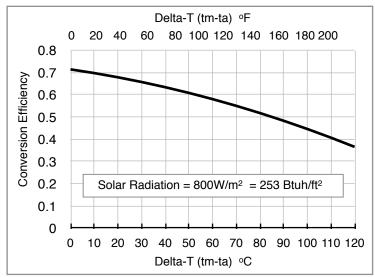

Sustainable HOT WATER Solutions, Delivered by APRICUS

Apricus Solar Co., Ltd

service@apricus.com www.apricus.com