

# **Technical Information**

# ETC-22 Solar Collector

International Version A11-01.2.2.1-PB-V2 - March 2015

#### **Part Codes**

ETC-22 Solar Collector Complete is comprised of:

1 x ETC-22-KIT (Manifold and standard frame)

1 x BOX-ET/HP-10/10 (Tubes and heat pipes)

1 x BOX-ET/HP-12/12 (Tubes and heat pipes)

## **Applications**

The Apricus ETC-22 collector is designed to be used in a wide variety of solar thermal (heat) applications in almost any climate. The evacuated tube and heat pipe technology provides very efficient and reliable solar thermal production in a simple to install design.

#### **Features**

- Twin glass evacuated tube (passive solar tracking)
- Freeze resistant heat pipes
- Only 4 braze points, extremely reliable header design
- · Steam-back and drain-back compatible
- Potable water certified copper header pipe
- Flared compressions fittings for reliable, leak free connections
- Cvclone rated, corrosion resistant aluminium mounting frame
- 10 year limited warranty on tubes and heat pipes
- 15 year limited warranty on copper header and AL frame
- · Efficient performance at high differential temperatures

#### **Materials of Construction**

**Evacuated Tubes:** Borosilicate 3.3 Glass

Absorber: Cu-AL/N-SS Heat Pipes: High purity copper Heat Transfer Fins: Aluminium

**Rubber Components:** HTV Silicone Rubber

Mounting Frame: 6005-T5 Anodized Aluminium

316 SS Fasteners

3003 AL, PVDF coating Manifold Casing:

#### **Performance Data**

Recommended Flow Rate: 1.5 L/min Max Flow Rate: 15 L/min Peak Power Output: 1477 W Eta0: 0.714 \* a1 (W/m2K): 1.243 \* a2 (W/m2K2): 0.009 \*

\* Data from TUV report 154035663 for Solarkeymark certification.

# **Physical Specifications**

Dimensions (WxHxD): 1636 x 2005 x 136mm

Aperture Area: 2.07 m<sup>2</sup> Gross Area: 3.28 m<sup>2</sup> Gross Dry Weight: 71.3 kg Fluid Capacity: 600 ml Max Operating Pressure: 800 kPa Stagnation Temperature: 228°C


# Certifications

Solarkeymark: 011-7S2323R AS/NZS 2712-2007: 100633 S-5995 USEC: NSF-61 Tested: 17248





# **Collector Performance (aperture area)**

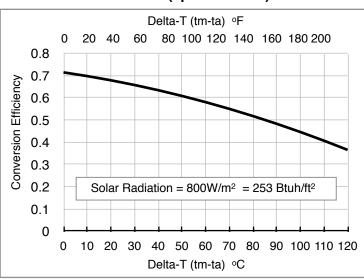

### Sustainable HOT WATER Solutions, Delivered by APRICUS

Apricus Solar Co., Ltd

www.apricus.com service@apricus.com